


CAB202F is a recessed light made of extruded aluminum housing, capped with a flexible flush frosted lens.

This linear LED luminaire is designed to produce a uniform distribution of diffused light in wooden platforms. CAB202F has a narrow base and is suitable for under cabinet, stair nosing and wall unit linear light designs. This channel comes in variable lengths up to 8 feet. \*

Cab series are complemented with dimmable, energy-efficient, dot-free LED, producing high color rendering index lighting. The bright white LED light source with CCT options from 2200K to 6000K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. CAB202F is a perfect fit for use in residential and commercial to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

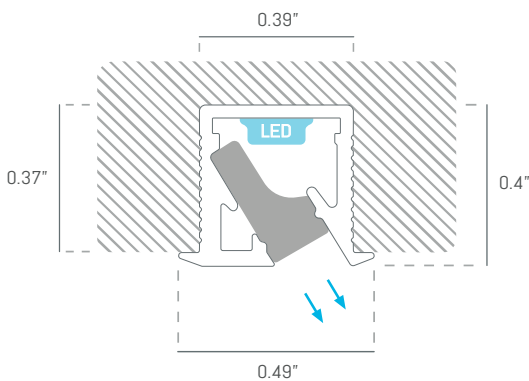

SPECIFICATIONS

**ELECTRICAL**

- Input**  
24 V - 3.7 W/ft - 12 W/m
- Power Supply**  
Class 2 Dimmable 20KHZ  
Lutron Hi-lume 0.1%  
Lutron 3-wire 100%-1%
- Operating temp**  
- 31°F to + 113°F  
- 35°C to + 45°C

**CONTROL**

- Options**  
Combination of wireless wall touch keys, portable remotes, and mobile App
- Range**  
Wireless controlling transmits RF in 30m range
- Multi-zone**  
Individual and collective zone options for color and brightness control
- Dimming**  
Brightness, color tuning, & light mode with memory saving options

**PHYSICAL**

- Dimension**  
0.49 in x 0.4 in - 12.4 x 10.2 mm  
Up to 8 ft (2.5 m) length \*
- Finish**  
Dark Grey, Black Matte Finish \*
- Field**  
Indoor dry applications
- Mounting**  
Recessed under cabinet or wooden platforms



**LIGHT**

- LED type**  
Single White
- CCT**  
3000K 3500K 4000K  
4500K 5000K 5500K \*
- CRI**  
High CRI up to 90 \*
- Brightness**  
200 Lm/ft - 700 Lm/m \*
- Life time**  
50,000 hours
- Warranty**  
5 years warranty

\* AVAILABLE FOR CUSTOM APPLICATIONS. VISIT [ENOLIGHT.COM](http://ENOLIGHT.COM) OR CONTACT [SALES@ENOLIGHT.COM](mailto:SALES@ENOLIGHT.COM) +1 833 366 5444 FOR FURTHER DETAILS. DISCLAIMER: THE ACTUAL PRODUCT MAY VARY FROM THE IMAGES SHOWN. DUE TO DIFFERENCES IN MONITORS, COLOURS OF PRODUCTS MAY ALSO APPEAR DIFFERENT TO THOSE SHOWN. SPECIFICATION AND ILLUSTRATIONS PROVIDED FOR EACH PRODUCT IS TO BE USED AS A GENERAL GUIDE ONLY. COPYRIGHT © 2017-2019 ENOLIGHT LTD. ALL RIGHTS RESERVED.