ENOLIGHT
BEYOND LIGHT

EDGE SERIES

RECESSED MOUNT
STONE TILE WOODEN CORNER LIGHT

EDG2214F

CHARACTERISTICS


EDG2214F is a recessed linear profile made of extruded aluminum housing with a protective silver anodized finish, capped with a flush frosted lens.

This linear LED luminaire is designed to produce a uniform distribution of diffused light in tile, stone, and wooden platforms. EDG2214F is suitable for inside corners and comes in variable lengths up to 18 feet. *

Edge series are complemented with dimmable, energy-efficient, dot-free LED, producing high color rendering index lighting. The bright white LED light source with CCT options from 2700K to 6500K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. EDG2214F is a perfect fit for use in residential and commercial spaces for damp and dry applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

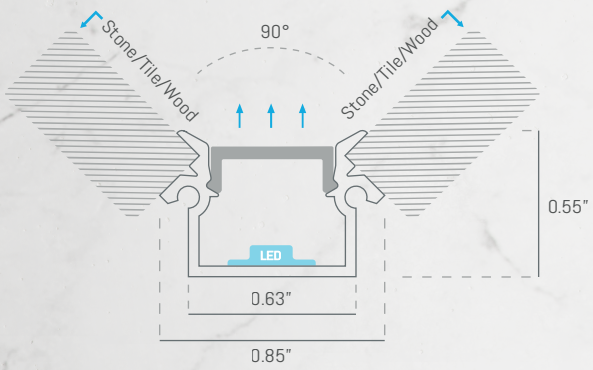

SPECIFICATIONS

ELECTRICAL

Input
24 V - 5 W/ft - 16 W/m

Power Supply
Class 2 Dimmable 20KHZ
Lutron Hi-lume 0.1%
Lutron 3-wire 100%-1%

Operating temp
- 31°F to + 113°F
- 35°C to + 45°C

Certification
U.S./Canada UL approved
Type IC Recessed

c UL US LISTED E505874

CONTROL

Options
Combination of wireless wall touch keys, portable remotes, and mobile App

Range
Wireless controlling transmits RF in 30m range

Multi-zone
Individual and collective zone options for color and brightness control

Dimming
Brightness, color tuning, & light mode with memory saving options

PHYSICAL

Dimension
0.85 in x 0.55 in - 22x14 mm
Up to 18 ft (5.5 m) length *
0.11 lbs/ft - 0.16 kg/m

Finish
Silver anodized aluminium, black, or white finish *

Field
Damp and dry applications

Mounting
Recessed in stone, tiles, and wooden inside corners

LIGHT

LED type
White, tunable white, RGB Circadian BIOS SkyBlue

CCT
2700K 3000K 3500K
4000K 5000K *

CRI
High CRI up to 97 *

Brighness
400 Lm/ft - 1400 Lm/m *

Life time
50,000 hours

Warranty
5 years warranty

* AVAILABLE FOR CUSTOM APPLICATIONS. VISIT ENOLIGHT.COM OR CONTACT SALES@ENOLIGHT.COM +1 833 366 5444 FOR FURTHER DETAILS.

DISCLAIMER: THE ACTUAL PRODUCT MAY VARY FROM THE IMAGES SHOWN. DUE TO DIFFERENCES IN MONITORS, COLOURS OF PRODUCTS MAY ALSO APPEAR DIFFERENT TO THOSE SHOWN. SPECIFICATION AND ILLUSTRATIONS PROVIDED FOR EACH PRODUCT IS TO BE USED AS A GENERAL GUIDE ONLY.
COPYRIGHT © 2017-2019 ENOLIGHT LTD. ALL RIGHTS RESERVED.