


HRZ4915F is a recessed linear light made of extruded aluminum housing with a protective silver anodized finish.

This linear LED luminaire is designed to produce a uniform distribution of indirect light in wall wash, floor wash, or ceiling wall applications. HRZ4915F can be installed as a 1.5in flush baseboard or crown light in between floor and wall or ceiling and wall. This channel comes in variable lengths up to 18 feet. *

Horizon series are complemented with dimmable, energy-efficient, dot-free LED, producing high color rendering index lighting. The bright white LED light source with CCT options from 2200K to 6000K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. HRZ4915F is a perfect fit for use in residential and commercial spaces for damp and dry applications to produce decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

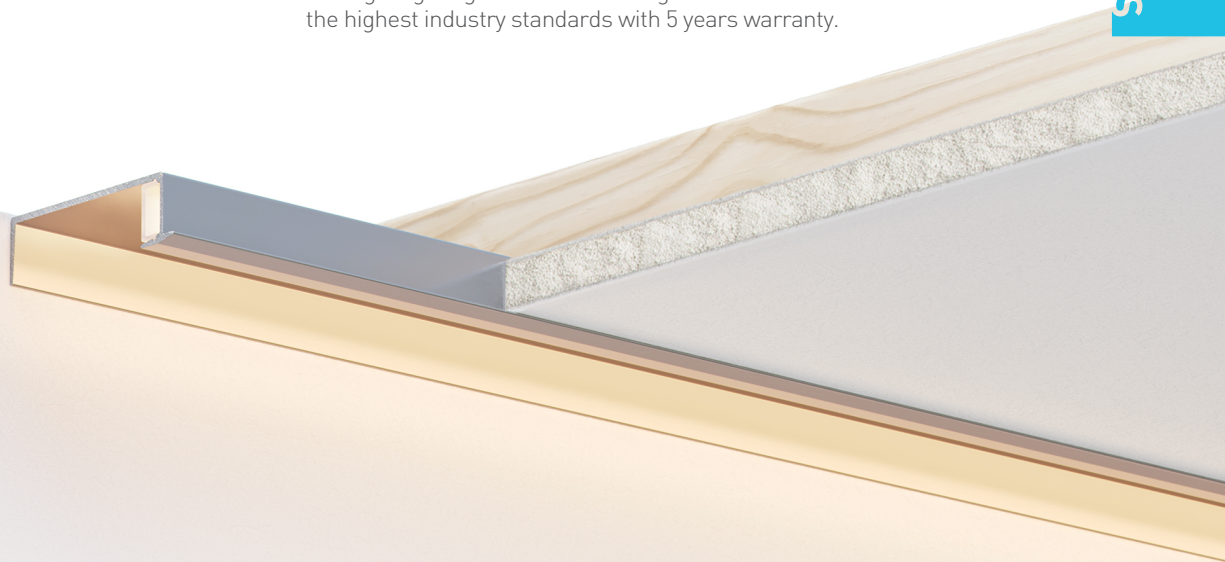

SPECIFICATIONS

ELECTRICAL

Input

24 V - 2 W/ft - 8 W/m

Power Supply

Class 2 Dimmable 20KHZ
Lutron Hi-lume 0.1%
Lutron 3-wire 100%-1%

Operating temp

- 31°F to + 113°F
- 35°C to + 45°C

Certification

U.S./Canada UL approved
Type IC Recessed



CONTROL

Options

Combination of wireless wall touch keys, portable remotes, and mobile App

Range

Wireless controlling transmits RF in 30m range

Multi-zone

Individual and collective zone options for color and brightness control

Dimming

Brightness, color tuning, & light mode with memory saving options

PHYSICAL

Dimension

1.93 in x 0.57 in - 49x14mm
Up to 18 ft (5.5 m) length *
0.18 lbs/ft - 0.27 kg/m

Finish

Silver anodized aluminium, black, or white finish *

Field

Damp and dry applications

Mounting

Recessed in ceiling board platforms



LIGHT

LED type

Single and tunable white, Circadian BIOS SkyBlue

CCT

3000K 3500K 4000K
4500K 5000K 5500K *

CRI

High CRI up to 97 *

Brightness

200 Lm/ft - 720 Lm/m *

Life time

50,000 hours

Warranty

5 years warranty

* AVAILABLE FOR CUSTOM APPLICATIONS. VISIT ENOLIGHT.COM OR CONTACT SALES@ENOLIGHT.COM +1 833 366 5444 FOR FURTHER DETAILS. DISCLAIMER: THE ACTUAL PRODUCT MAY VARY FROM THE IMAGES SHOWN. DUE TO DIFFERENCES IN MONITORS, COLOURS OF PRODUCTS MAY ALSO APPEAR DIFFERENT TO THOSE SHOWN. SPECIFICATION AND ILLUSTRATIONS PROVIDED FOR EACH PRODUCT IS TO BE USED AS A GENERAL GUIDE ONLY. COPYRIGHT © 2017-2019 ENOLIGHT LTD. ALL RIGHTS RESERVED.