


HYN1913F is a recessed surface linear profile made of extruded aluminum housing, capped with 3/4 inch flat frosted lens.

This linear LED luminaire is designed to produce a uniform distribution of diffused light in tile, stone, and wooden board platforms. HYN1913F has a waterproof construct and is suitable for wall, ceiling, and under coping in wet environments such as pool and showers. The channel may be secured on a flat or curved surface using mounting clips and comes in variable lengths up to 18 feet. *

Hyphen series are complemented with dimmable, energy-efficient, dot-free LED, producing high color rendering index lighting. The bright white LED light source with CCT options from 2200K to 6000K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. HYN1409F is a perfect fit for use in indoor and outdoor applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

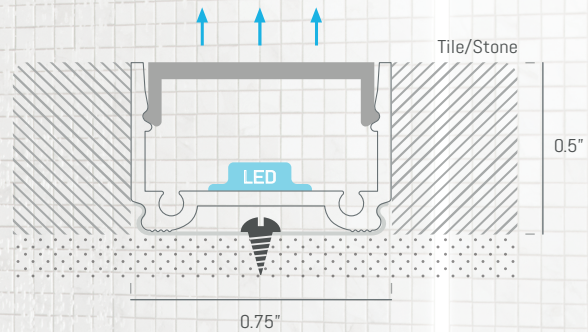

ELECTRICAL

WATTAGE

2.4W/ft, 5W/ft
24 Volt DC input

OPERATING TEMP

-31°F to +113°F
-35°C to +45°C

CERTIFICATION

U.S./Canada UL approved
Type IC Recessed



CONTROL

DIMMING MODE

Class 2 Flicker-Free
Dimmable, DMX Tunable,
Non-Dimmable

WALL KEYPAD

Dimmer switch, Multi-zone
DMX dim and tuning touch
key with smart mobile App

PHYSICAL

DIMENSION

0.75 in x 0.5 in, 19x13mm
Up to 18ft length, 0.09 lb/ft

FINISH

Mill, black, white, silver
anodized finish *

FIELD

Recessed in wood, stone,
and tile wet areas



LIGHT

LED TYPE

Single white, Tunable white,
Circadian Rhythm

EFFICACY

100 Lm/W, Max 400 Lm/ft *

LIFESPAN

50,000 hours

WARRANTY

5 years warranty

SPK1913F	12F	200	MF	30K	JT	F2
3/4 Inch Trimless Linear LED Light	1FT-18FT 1' to 18' Custom length up to 18'	200 200lm/ft 2.4W/ft 400 400lm/ft 5W/ft	SA Silver Anodized BM Black Matte WM White Matte MF Mill Finish	27K 2700K Incandescent 90CRI 30K 3000K Warm Halogen 90CRI 35K 3500K Neutral White 90CRI 40K 4000K Cool White 90CRI 50K 5000K Daylight White 90CRI 27T 2700K-6500 Tunable 90CRI	JT Triac Phase Dimming JX DMX Multi-Channel JN Non-Dimmable JD DALI Dimmable	F2 Dry Field F5 Wet Field

* Available for custom applications. Visit enolight.com or contact sales@enolight.com for further details.

Disclaimer: The actual product may vary from the images shown. Due to differences in monitors, colours of products may also appear different to those shown. Specification and illustrations provided for each product is to be used as a general guide only. Copyright © EnoLight Ltd. All Rights Reserved.