


SPK5917F is a recessed linear profile made of extruded aluminum housing with a protective silver anodized finish, capped with a flush frosted lens.

This luminaire is designed to produce a uniform distribution of diffused light in tile, stone, and wooden platforms. SPK5917F is suitable for inside corners and comes in variable lengths up to 8 feet.\*

Spark series can be conveniently controlled with multi-zone wall touch keypad and smart mobile app options. SPK5917F is a perfect fit for use in residential and commercial spaces for wet and dry applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

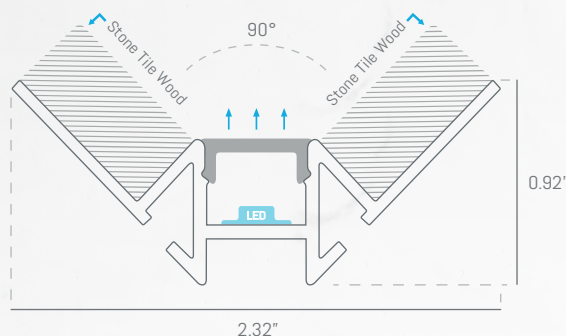

## ELECTRICAL

### WATTAGE

2.4W/ft, 5W/ft  
24 Volt DC input

### OPERATING TEMP

-31°F to +113°F  
-35°C to +45°C

### CERTIFICATION

U.S./Canada UL approved  
Type IC Recessed



## CONTROL

### DIMMING MODE

Class 2 Flicker-Free  
Dimmable, DMX Tunable,  
Non-Dimmable

### WALL KEYPAD

Dimmer switch, Multi-zone  
DMX dim and tuning touch  
key with smart mobile App

## PHYSICAL

### DIMENSION

2.32 in x 0.92 in, 59x23mm  
Up to 8ft length, 0.26 lb/ft

### FINISH

Silver anodized, Black matte,  
White matte \*

### FIELD

Recessed in wet or dry  
inside corners



## LIGHT

### LED TYPE

Single white, Tunable white,  
RGBW, Circadian Rhythm

### EFFICACY

100 Lm/W, Max 400 Lm/ft \*

### LIFESPAN

50,000 hours

### WARRANTY

5 years warranty

## SPECIFICATIONS

| SPK5917F                       | 8F   | 200  | SA  | 30K   | JT  | F2   |
|--------------------------------|--|--|---|---|---|--|
| Inside Corner Linear LED Light | <b>1FT-8FT</b><br>1' to 8'<br>Custom length up to 8' | <b>200</b> 200lm/ft 2.4W/ft<br><b>400</b> 400lm/ft 5W/ft | <b>SA</b> Silver Anodized<br><b>BM</b> Black Matte<br><b>WM</b> White Matte | <b>27K</b> 2700K Incandescent 90CRI<br><b>30K</b> 3000K Warm Halogen 90CRI<br><b>35K</b> 3500K Neutral White 90CRI<br><b>40K</b> 4000K Cool White 90CRI<br><b>50K</b> 5000K Daylight White 90CRI<br><b>27T</b> 2700K-6500 Tunable 90CRI<br><b>RGBW</b> RGB and 6500K White 90CRI<br><b>CR</b> Circadian Rhythm 97R9 98CRI | <b>JT</b> Triac Phase Dimming<br><b>JX</b> DMX Multi-Channel<br><b>JN</b> Non-Dimmable<br><b>JD</b> DALI Dimmable | <b>F2</b> Dry Field<br><b>F5</b> Wet Field |

\* Available for custom applications. Visit [enolight.com](http://enolight.com) or contact [sales@enolight.com](mailto:sales@enolight.com) for further details.

Disclaimer: The actual product may vary from the images shown. Due to differences in monitors, colours of products may also appear different to those shown. Specification and illustrations provided for each product is to be used as a general guide only. Copyright © EnoLight Ltd. All Rights Reserved.