
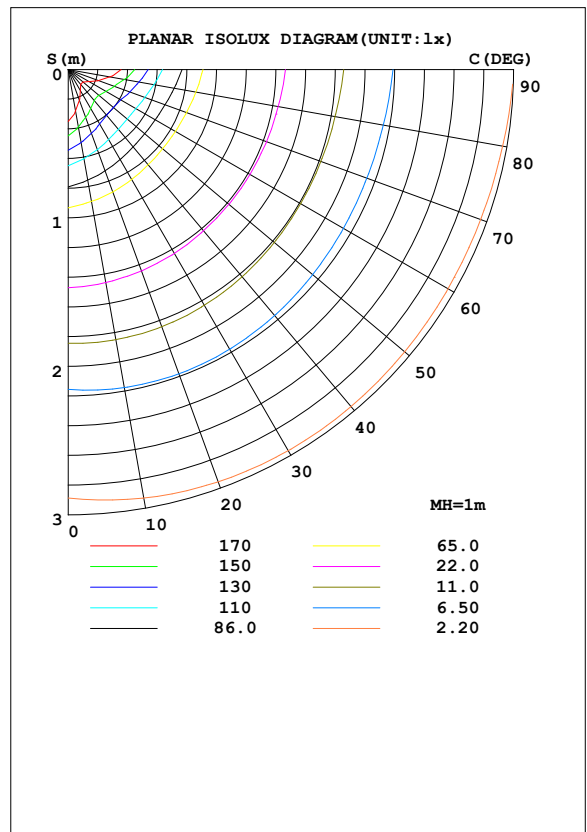


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-

DATA OF LAMP		PHOTOMETRIC DATA Eff: 53.81 lm/W			
MODEL	COB STRIP	I _{max} (cd)	187.0	S/MH (C0/180)	1.32
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	636.97	η UP, DN (C0-180)	1.1, 50.2
NOMINAL FLUX (lm)	636.966	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.0
LAMPS INSIDE	1	η up (%)	1.8	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	23.9	η down (%)	98.2	CIBSE SHR MAX	1.55

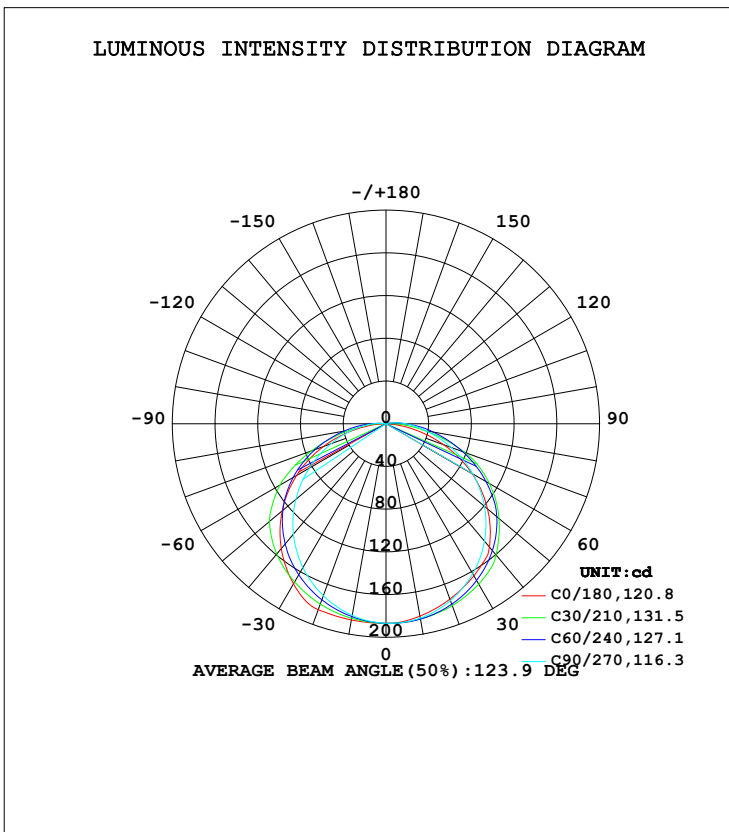

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Kiki
 Test Date: 2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 51.8%
 Test Distance: 3.154m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	182.9	185.7	184.8	185.9	186.5	184.2	182.2	183.9	0- 10	17.73	17.73	2.78,2.78
20	174.8	180.6	176.2	180.7	185.3	177.6	171.4	177.0	10- 20	51.41	69.14	10.9,10.9
30	164.5	171.5	162.3	171.9	173.2	167.2	155.5	166.4	20- 30	79.97	149.1	23.4,23.4
40	150.6	157.7	143.5	159.2	152.6	153.0	134.9	151.8	30- 40	100.2	249.3	39.1,39.1
50	124.1	136.8	120.4	140.3	126.9	134.4	110.3	131.1	40- 50	109.1	358.4	56.3,56.3
60	92.82	109.9	93.76	113.9	96.55	107.5	82.71	103.7	50- 60	104.1	462.6	72.6,72.6
70	57.50	77.36	64.96	79.80	62.29	72.47	54.79	69.02	60- 70	85.23	547.8	86,86
80	21.38	40.72	38.06	42.06	26.92	37.10	30.44	33.23	70- 80	54.38	602.2	94.5,94.5
90	0.5040	13.33	18.98	14.86	1.561	11.24	12.00	8.684	80- 90	23.42	625.6	98.2,98.2
100	0.4300	2.477	5.485	2.670	0.2624	0.9636	1.380	0.6369	90-100	5.680	631.3	99.1,99.1
110	0.6288	0.7553	0.8038	0.7970	0.4913	0.7105	0.5392	0.6831	100-110	1.007	632.3	99.3,99.3
120	0.8495	0.9717	0.7328	0.9726	0.7832	0.9910	0.7494	0.9570	110-120	0.7699	633.0	99.4,99.4
130	1.077	1.220	0.9391	1.233	1.026	1.268	0.9608	1.230	120-130	0.9180	634.0	99.5,99.5
140	1.212	1.411	1.119	1.439	1.170	1.467	1.131	1.424	130-140	0.9622	634.9	99.7,99.7
150	1.251	1.506	1.227	1.548	1.207	1.566	1.228	1.502	140-150	0.8662	635.8	99.8,99.8
160	1.201	1.474	1.238	1.540	1.159	1.539	1.229	1.461	150-160	0.6526	636.4	99.9,99.9
170	1.190	1.451	1.203	1.527	1.168	1.515	1.187	1.449	160-170	0.3897	636.8	100,100
180	1.294	1.592	1.286	1.605	1.289	1.593	1.287	1.604	170-180	0.1339	637.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 303.59 lm

%lum = 47.7%

%lamp = 47.7%

Conical surface Flux(120deg): 462.55 lm

%lum = 72.6%


%lamp = 72.6%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-

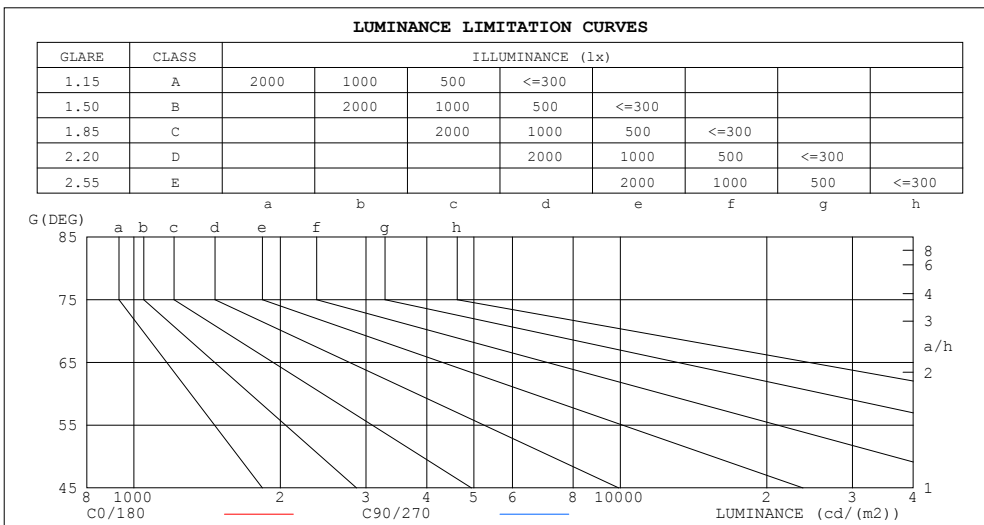

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	48	183
80	71	126
75	87	113
70	97	110
65	103	109
60	107	108
55	110	108
50	111	108
45	113	108


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.: 1m	Shielding Angle:-

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.02	.97	.93	.99	.95	.91	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.88	.80	.74	.86	.79	.73	.82	.76	.71	.78	.73	.69	.75	.71	.67	.65
3.0	.77	.68	.61	.75	.67	.60	.71	.65	.59	.68	.63	.58	.66	.61	.56	.54
4.0	.67	.58	.51	.66	.57	.51	.63	.56	.50	.60	.54	.49	.58	.52	.48	.46
5.0	.60	.50	.44	.59	.50	.43	.56	.48	.43	.54	.47	.42	.52	.46	.41	.39
6.0	.54	.44	.38	.53	.44	.37	.51	.43	.37	.49	.42	.36	.47	.41	.36	.34
7.0	.49	.39	.33	.48	.39	.33	.46	.38	.32	.44	.37	.32	.43	.36	.32	.30
8.0	.44	.35	.29	.43	.35	.29	.42	.34	.29	.40	.34	.29	.39	.33	.28	.26
9.0	.40	.32	.26	.40	.32	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.23
10.0	.37	.29	.24	.37	.29	.24	.35	.28	.23	.34	.28	.23	.33	.27	.23	.21

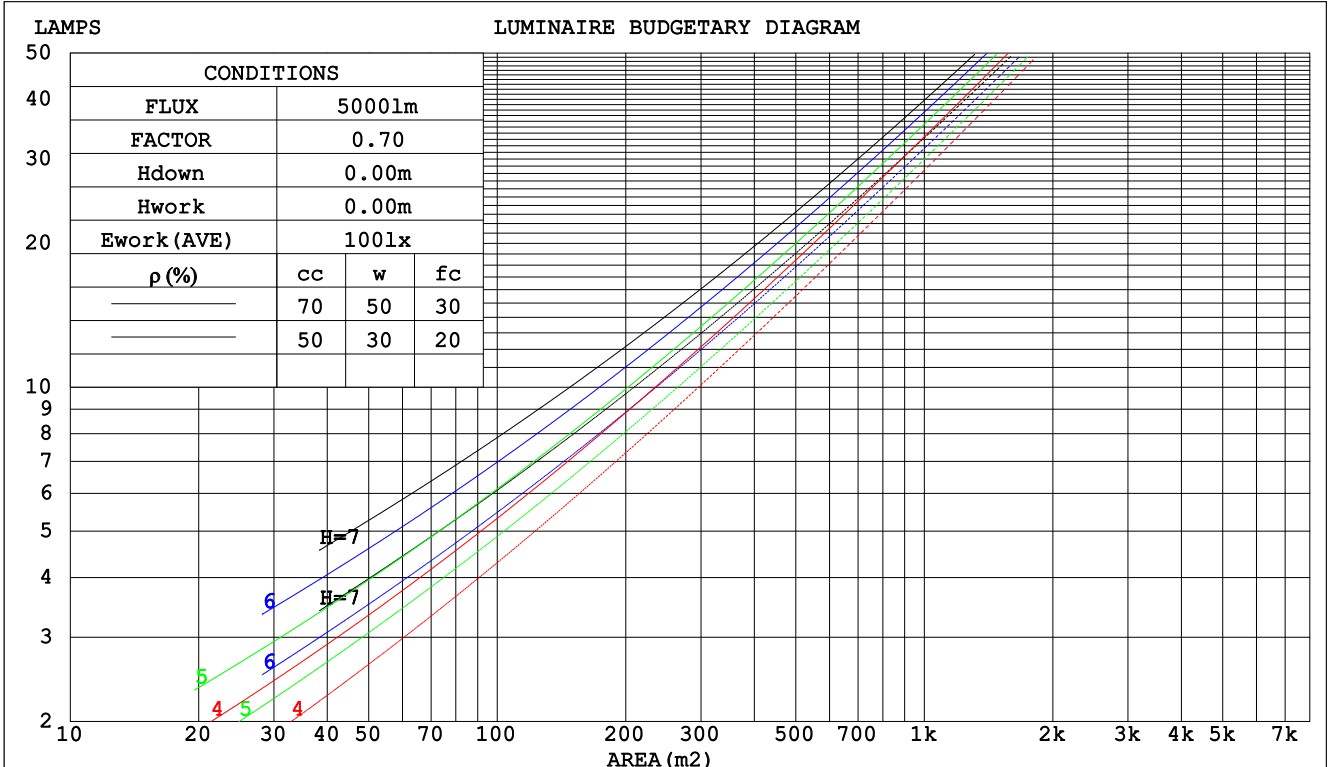

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.342	.194	.062	.334	.190	.060	.319	.183	.059	.306	.177	.057	.294	.170	.055	
2.0	.313	.171	.053	.306	.169	.052	.293	.163	.051	.281	.158	.049	.270	.153	.048	
3.0	.285	.152	.046	.279	.150	.045	.268	.145	.044	.257	.141	.043	.248	.137	.042	
4.0	.261	.136	.040	.256	.134	.040	.245	.130	.039	.236	.127	.038	.227	.123	.038	
5.0	.240	.122	.035	.235	.121	.035	.226	.118	.035	.217	.115	.034	.210	.112	.034	
6.0	.221	.111	.032	.217	.110	.032	.209	.107	.031	.201	.105	.031	.194	.102	.030	
7.0	.205	.101	.029	.201	.100	.029	.194	.098	.028	.187	.096	.028	.181	.094	.028	
8.0	.191	.093	.026	.187	.092	.026	.181	.090	.026	.175	.089	.026	.169	.087	.025	
9.0	.178	.086	.024	.175	.085	.024	.169	.084	.024	.164	.082	.024	.159	.081	.023	
10.0	.167	.080	.022	.164	.079	.022	.159	.078	.022	.154	.077	.022	.149	.075	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.196	.170	.146	.168	.146	.125	.115	.100	.087	.066	.058	.050	.021	.019	.016	
2.0	.189	.146	.109	.162	.125	.094	.111	.087	.066	.064	.050	.039	.021	.016	.013	
3.0	.181	.128	.086	.155	.111	.075	.107	.077	.052	.062	.045	.031	.020	.015	.010	
4.0	.174	.115	.070	.149	.100	.061	.103	.069	.043	.059	.041	.026	.019	.013	.008	
5.0	.166	.105	.060	.143	.091	.052	.098	.063	.037	.057	.037	.022	.018	.012	.007	
6.0	.159	.097	.052	.137	.084	.045	.094	.059	.032	.055	.034	.019	.018	.011	.006	
7.0	.152	.090	.046	.131	.078	.040	.090	.055	.029	.052	.032	.017	.017	.011	.006	
8.0	.145	.084	.042	.125	.073	.037	.086	.051	.026	.050	.030	.016	.016	.010	.005	
9.0	.139	.079	.039	.120	.069	.034	.083	.048	.024	.048	.029	.014	.016	.009	.005	
10.0	.133	.075	.036	.115	.065	.032	.080	.046	.022	.046	.027	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm										
NAME: WAV1806C					TYPE: /			WEIGHT:		
SPEC.: /					DIM.: /			SERIAL No.:1		
MFR.: EnoLight					SUR.:1m			Shielding Angle:-		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.2	6.7	5.5	7.0	7.2	5.0	6.6	5.3	6.8	7.1
3H	6.9	8.3	7.2	8.6	8.9	6.9	8.4	7.3	8.7	8.9
4H	7.5	8.9	7.9	9.2	9.5	7.8	9.2	8.2	9.5	9.8
6H	7.9	9.2	8.3	9.5	9.8	8.7	10.0	9.0	10.3	10.6
8H	8.0	9.3	8.4	9.6	9.9	9.1	10.3	9.4	10.7	11.0
12H	8.0	9.3	8.4	9.6	9.9	9.5	10.7	9.9	11.1	11.4
4H 2H	5.8	7.2	6.2	7.5	7.8	5.7	7.1	6.1	7.4	7.7
3H	7.8	9.0	8.1	9.3	9.7	7.8	9.0	8.2	9.3	9.7
4H	8.6	9.7	9.0	10.0	10.4	8.8	9.9	9.2	10.3	10.7
6H	9.1	10.1	9.5	10.5	10.9	9.8	10.8	10.3	11.2	11.6
8H	9.3	10.2	9.7	10.6	11.0	10.3	11.3	10.8	11.7	12.1
12H	9.3	10.2	9.8	10.6	11.1	10.9	11.8	11.4	12.2	12.6
8H 4H	8.9	9.9	9.4	10.3	10.7	9.2	10.1	9.6	10.5	10.9
6H	9.7	10.5	10.2	10.9	11.4	10.4	11.2	10.9	11.6	12.1
8H	10.0	10.6	10.4	11.1	11.6	11.1	11.8	11.6	12.2	12.7
12H	10.1	10.7	10.6	11.2	11.7	11.8	12.4	12.3	12.9	13.4
12H 4H	9.0	9.8	9.5	10.3	10.7	9.2	10.1	9.7	10.5	10.9
6H	9.8	10.5	10.3	11.0	11.5	10.5	11.2	11.0	11.7	12.2
8H	10.2	10.8	10.7	11.3	11.8	11.3	11.9	11.8	12.3	12.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 637.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.6)
 Area: 2 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	35	54	42	35	52	41	35	28
0.80	64	52	44	63	52	44	61	51	44	36
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	69	61	78	68	60	75	66	60	52
1.50	85	74	67	83	73	66	80	71	65	57
2.00	92	83	76	90	81	75	86	79	73	65
2.50	96	88	81	94	86	80	90	83	78	69
3.00	100	92	86	97	91	85	93	87	83	73
4.00	104	98	93	102	96	91	97	92	88	79
5.00	107	101	97	104	99	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-

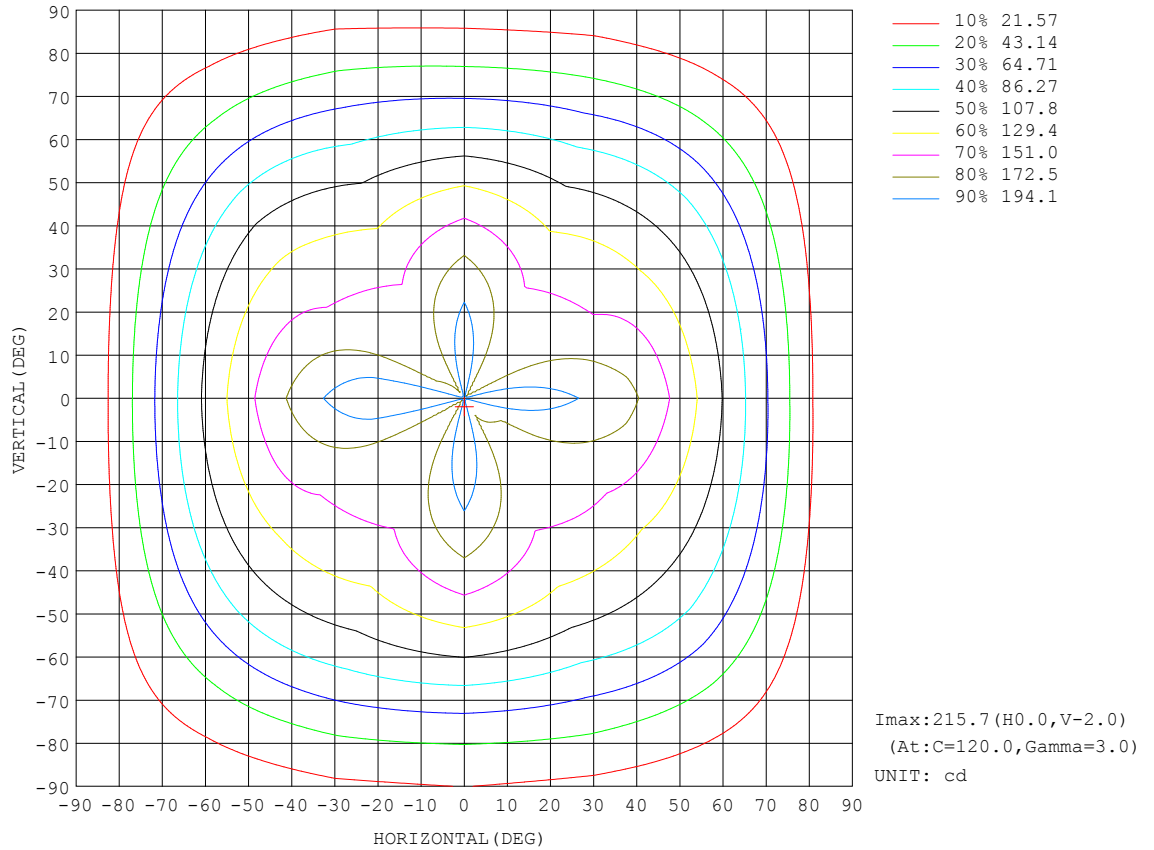


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.: 1m	Shielding Angle:-

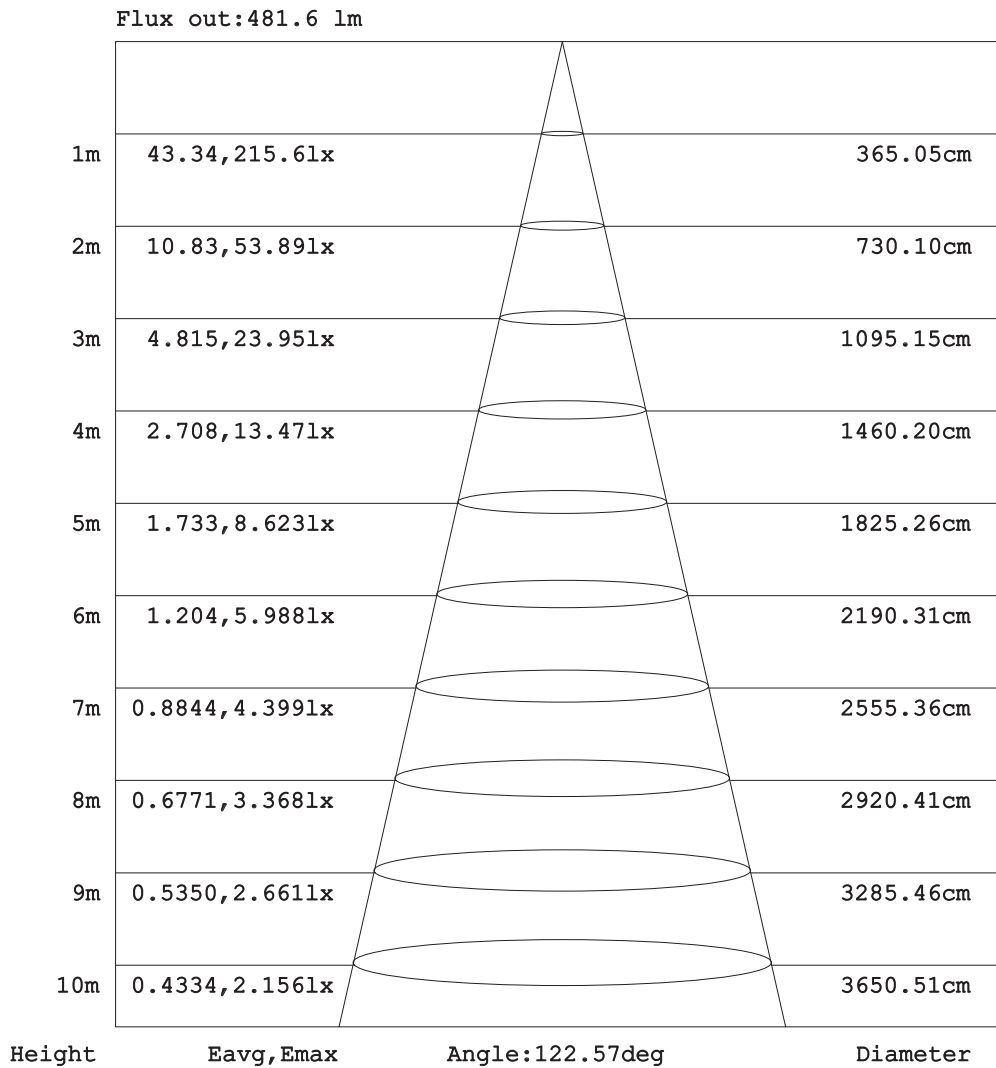


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Kiki
 Test Date: 2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 51.8%
 Test Distance: 3.154m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-

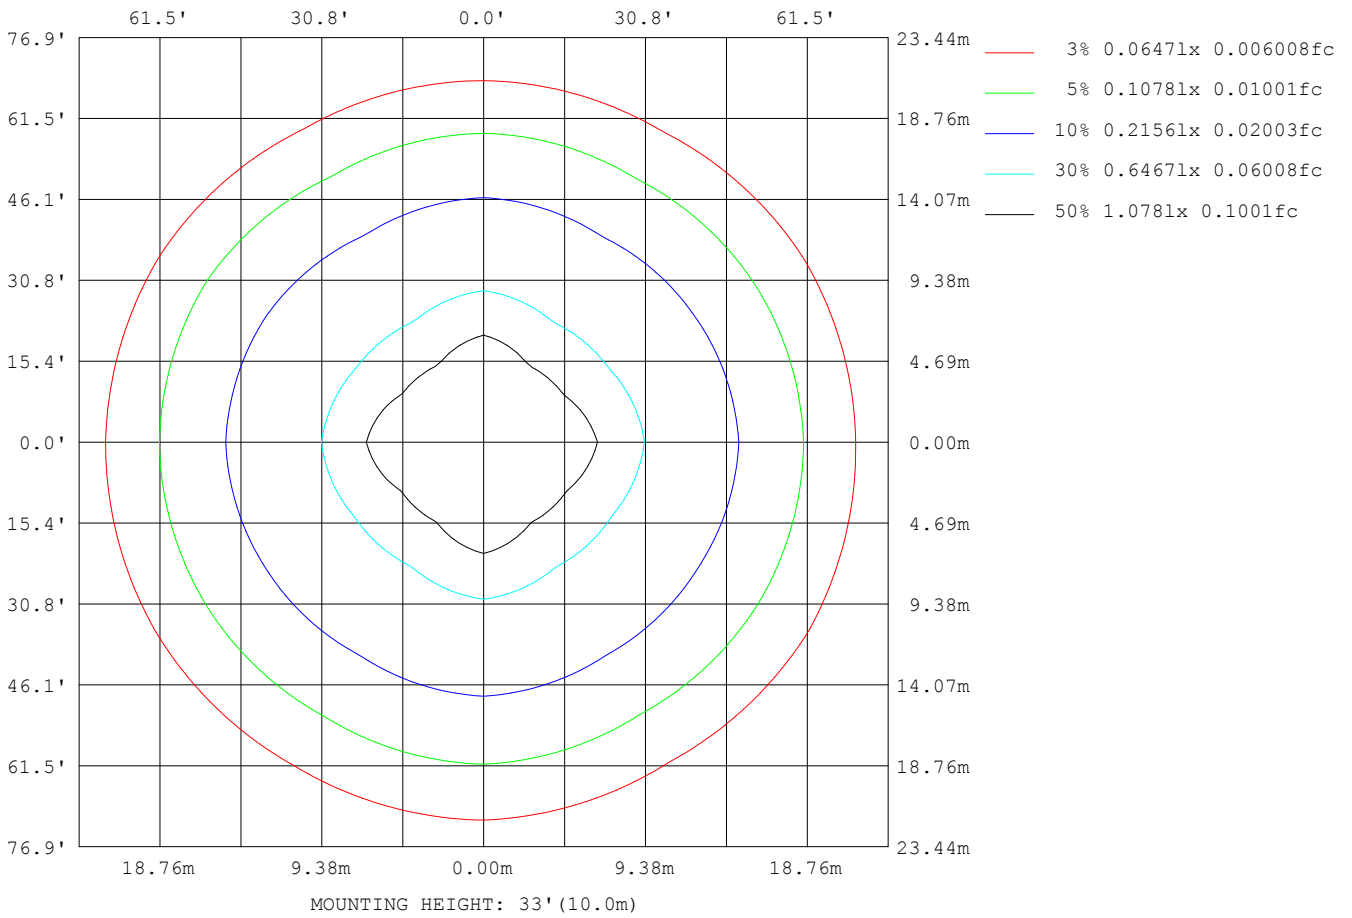

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-


AvgL	cd/m2
L_0~180 (65) av	92
L_0~180 (75) av	81
L_0~180 (85) av	54
L_90~270 (65) av	88
L_90~270 (75) av	90
L_90~270 (85) av	137
L_45 (65) av	113
L_45 (75) av	112
L_45 (85) av	141

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Kiki
Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:51.8%
Test Distance:3.154m [K=1.0000]
Remarks:

Planar Illuminance Curve

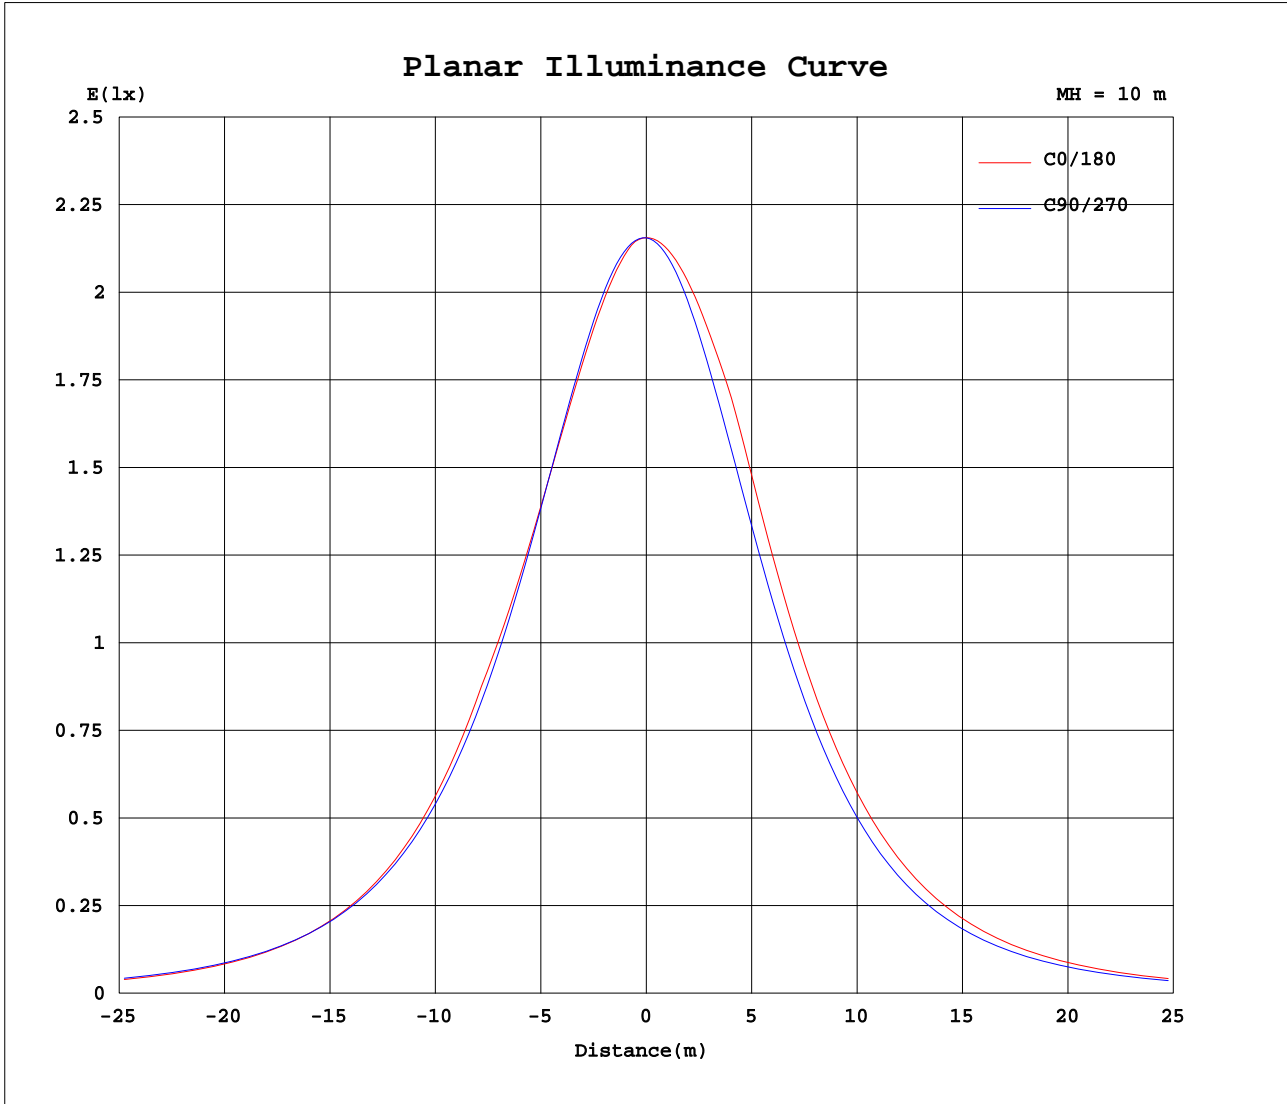

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Kiki
 Test Date: 2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 51.8%
 Test Distance: 3.154m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.198V I:0.4892A P:11.837W PF:1.0000 Freq:0Hz Lamp Flux:636.966x1 lm		
NAME: WAV1806C	TYPE: /	WEIGHT:
SPEC.: /	DIM.: /	SERIAL No.:1
MFR.: EnoLight	SUR.:1m	Shielding Angle:-

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	187	187	187	187	187	187	187	187	187	187	187	187							
5	186	187	187	187	187	187	187	186	186	185	186	186							
10	183	186	186	185	186	186	187	185	183	182	183	184							
15	179	184	183	181	183	184	186	183	180	178	180	182							
20	175	181	180	176	180	182	185	180	175	171	175	179							
25	170	178	175	170	175	178	181	176	170	164	170	175							
30	165	174	170	162	170	174	173	171	163	156	163	170							
35	159	168	163	154	163	169	164	166	156	146	155	164							
40	151	160	155	144	155	163	153	159	147	135	146	157							
45	138	150	146	132	146	156	140	151	137	123	136	150							
50	124	138	135	120	136	145	127	143	126	110	125	137							
55	109	126	123	107	124	131	112	129	114	96.8	113	123							
60	92.8	112	108	93.8	111	116	96.6	115	100	82.7	99.1	108							
65	75.6	96.8	92.6	79.5	97.3	100	79.8	95.2	85.8	68.6	83.9	92.0							
70	57.5	78.2	76.5	65.0	80.2	79.4	62.3	74.3	70.7	54.8	67.1	70.9							
75	39.1	56.8	60.2	50.8	62.9	58.1	44.3	53.6	55.1	42.0	51.1	49.7							
80	21.4	36.5	45.0	38.1	46.2	37.9	26.9	34.3	39.9	30.4	36.1	30.3							
85	7.29	20.0	31.4	27.7	31.9	21.4	11.5	18.4	26.4	20.2	23.2	15.8							
90	0.50	8.16	18.5	19.0	19.9	9.86	1.56	7.88	14.6	12.0	12.0	5.36							
95	0.35	2.50	10.72	11.3	11.2	2.94	0.23	1.77	5.80	5.11	3.89	0.65							
100	0.43	0.63	4.34	5.48	4.52	0.82	0.26	0.53	1.40	1.38	0.80	0.47							
105	0.53	0.60	1.23	2.06	1.44	0.63	0.36	0.57	0.64	0.46	0.59	0.54							
110	0.63	0.71	0.80	0.80	0.88	0.71	0.49	0.69	0.73	0.54	0.70	0.67							
115	0.73	0.85	0.78	0.65	0.83	0.85	0.64	0.84	0.86	0.64	0.82	0.81							
120	0.85	0.99	0.96	0.73	0.95	1.00	0.78	1.01	0.98	0.75	0.95	0.96							
125	0.97	1.12	1.08	0.84	1.07	1.14	0.91	1.16	1.11	0.86	1.09	1.11							
130	1.08	1.24	1.20	0.94	1.20	1.27	1.03	1.29	1.24	0.96	1.22	1.24							
135	1.16	1.35	1.31	1.03	1.31	1.38	1.11	1.40	1.36	1.06	1.33	1.35							
140	1.21	1.42	1.40	1.12	1.41	1.46	1.17	1.48	1.46	1.13	1.42	1.43							
145	1.24	1.48	1.47	1.18	1.49	1.52	1.20	1.53	1.53	1.19	1.49	1.47							
150	1.25	1.50	1.51	1.23	1.55	1.55	1.21	1.55	1.58	1.23	1.52	1.49							
155	1.23	1.49	1.52	1.24	1.57	1.55	1.19	1.54	1.59	1.24	1.51	1.47							
160	1.20	1.45	1.50	1.24	1.56	1.52	1.16	1.51	1.57	1.23	1.49	1.43							
165	1.18	1.43	1.47	1.22	1.54	1.51	1.15	1.50	1.54	1.20	1.46	1.42							
170	1.19	1.44	1.46	1.20	1.53	1.52	1.17	1.50	1.53	1.19	1.46	1.44							
175	1.24	1.51	1.51	1.25	1.56	1.57	1.22	1.54	1.54	1.23	1.51	1.51							
180	1.29	1.60	1.59	1.29	1.60	1.61	1.29	1.60	1.59	1.29	1.60	1.61							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Kiki
 Test Date:2022-11-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:51.8%
 Test Distance:3.154m [K=1.0000]
 Remarks: